


Horizontal Multi-Stage Jet/Centrifugal Pumps

Centrifugal Performance

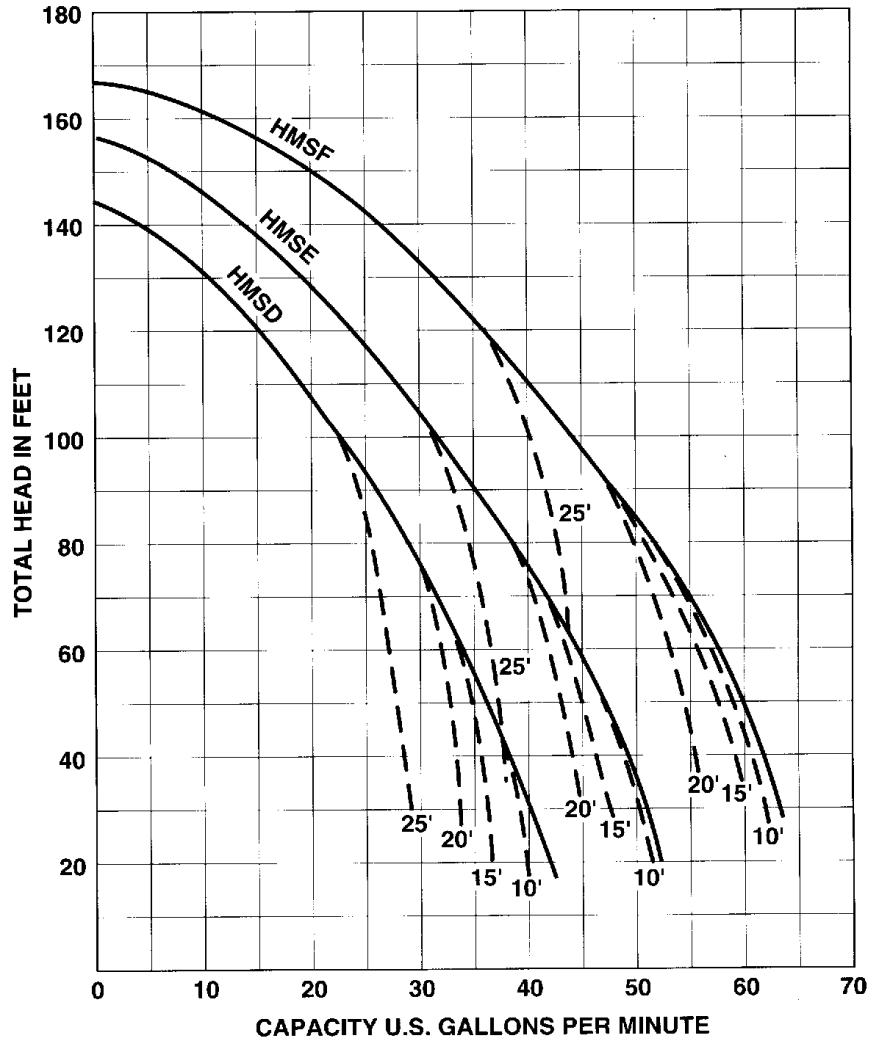

NOTE: Dotted lines indicate performance reduction at high suction lift.

NOTE: Pumps installed with a CON-AIRE[®] tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.